


The Bike Shelf

BY

KNIFE & SAW

~ SF, CA ~

In the Box

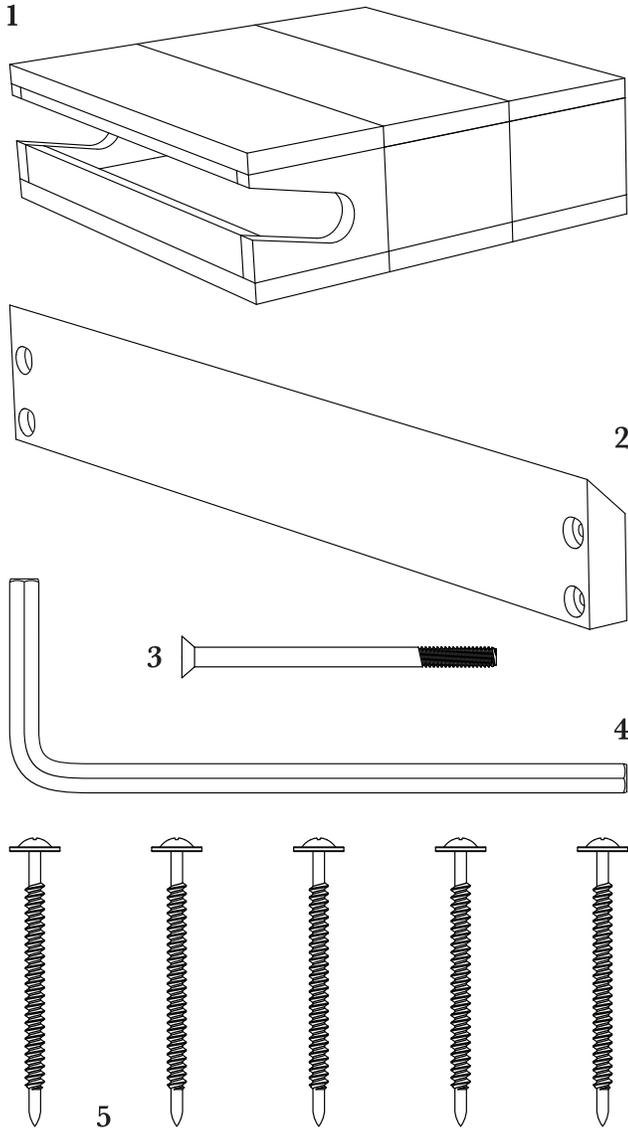

Included:

1. (1) Bike Shelf
2. (1) Mounting Cleat
3. (1) Socket Head Cap Screw
4. (1) Allen Wrench
5. (5) #8 Pan Head Wall Screws
(in case you lose one)

Tools Needed / Nice to Have:

1. Screw Gun / Drill
2. Phillips Head Screwdriver
3. Level

*Thank you for purchasing
The (original) Bike Shelf from
Knife & Saw. I hope you and
your bike enjoy it.*

CHRIS BRIGHAM / PRINCIPAL, KNIFE & SAW

Instructions

Step 1:

Remove the mounting cleat from *The Bike Shelf* by removing the bolt on the top back of *The Bike Shelf*.

Find and mark wall studs where you want to hang *The Bike Shelf*. The mounting cleat has 2 sets of holes at 16" apart.* If you are not able to hang at this width, please attach one side to a stud and the other using drywall anchors (found at a local hardware store).


*Standard is 16" (~406mm) apart on center in most countries

Step 2:

Using a level if possible, hold the mounting bracket up to wall at the desired height and mark where the holes line up. Next, pre-drill your marked holes.


Step 3:

Using the screws provided, secure the mounting cleat to the wall.

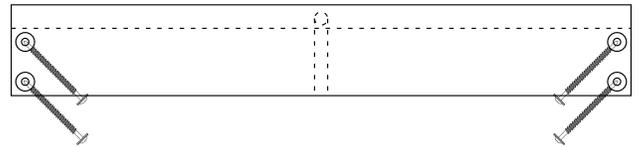

Step 4:

Once mounting cleat is securely attached to the wall, slide *The Bike Shelf* over and onto it so the opposing cleat on inside back of the shelf locks into it.

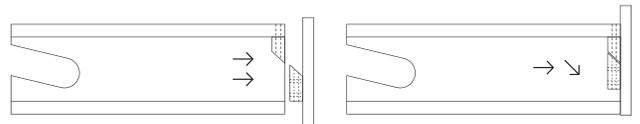

Step 5:

Once *The Bike Shelf* is all the way on the mount and against the wall, re-insert the bolt and tighten it with the provided allen wrench.

Step 6:

Hang your bike and enjoy.

*Knife and Saw LLC disclaims all liability for damage or injury resulting from the improper installation or use of *The Bike Shelf* to the fullest extent permitted by law. *The Bike Shelf* is intended to be secured to 2 wall studs. Weight limit for hanging bike is 40lbs. Do not ever sit on, stand on, or hang from *The Bike Shelf*.*